

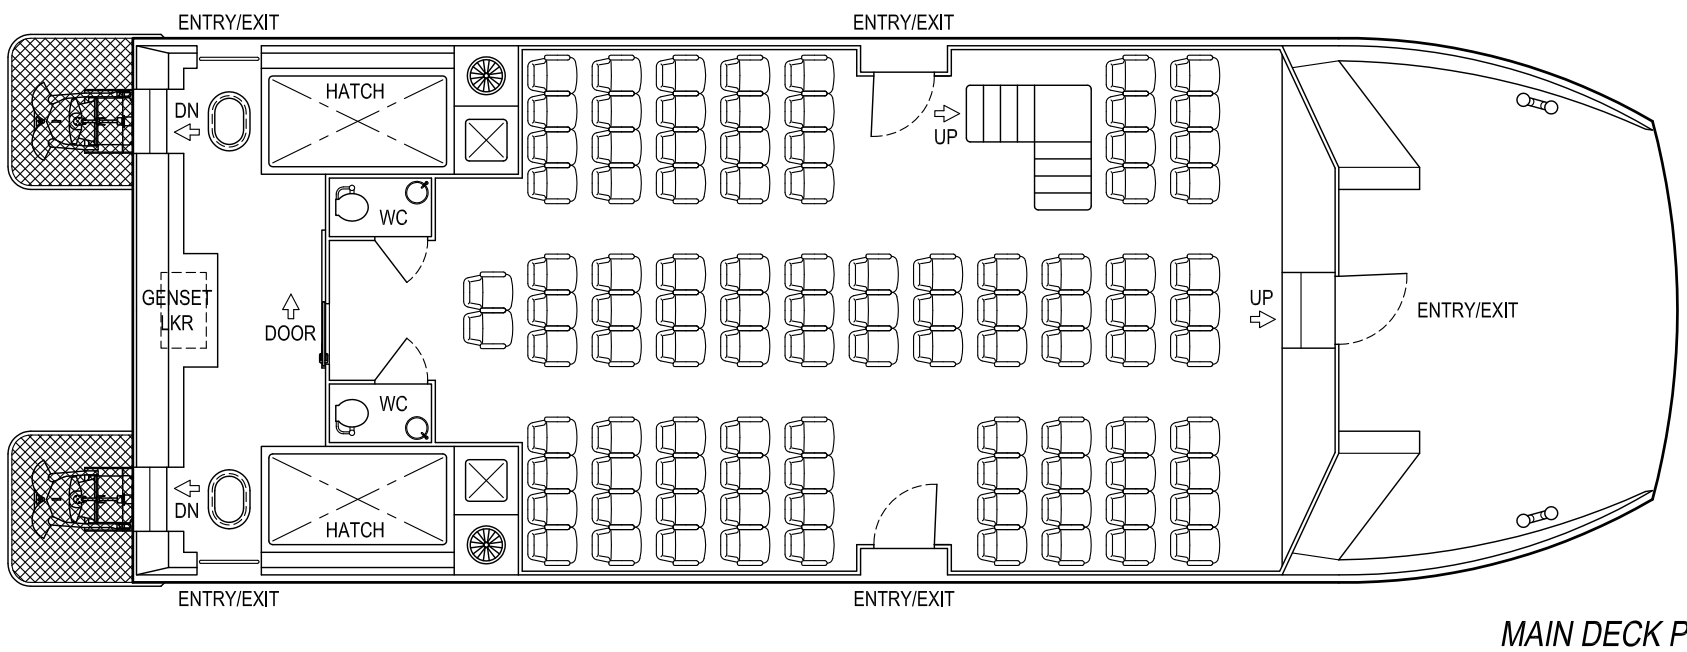


## 20m LOW WASH CATAMARAN FERRY

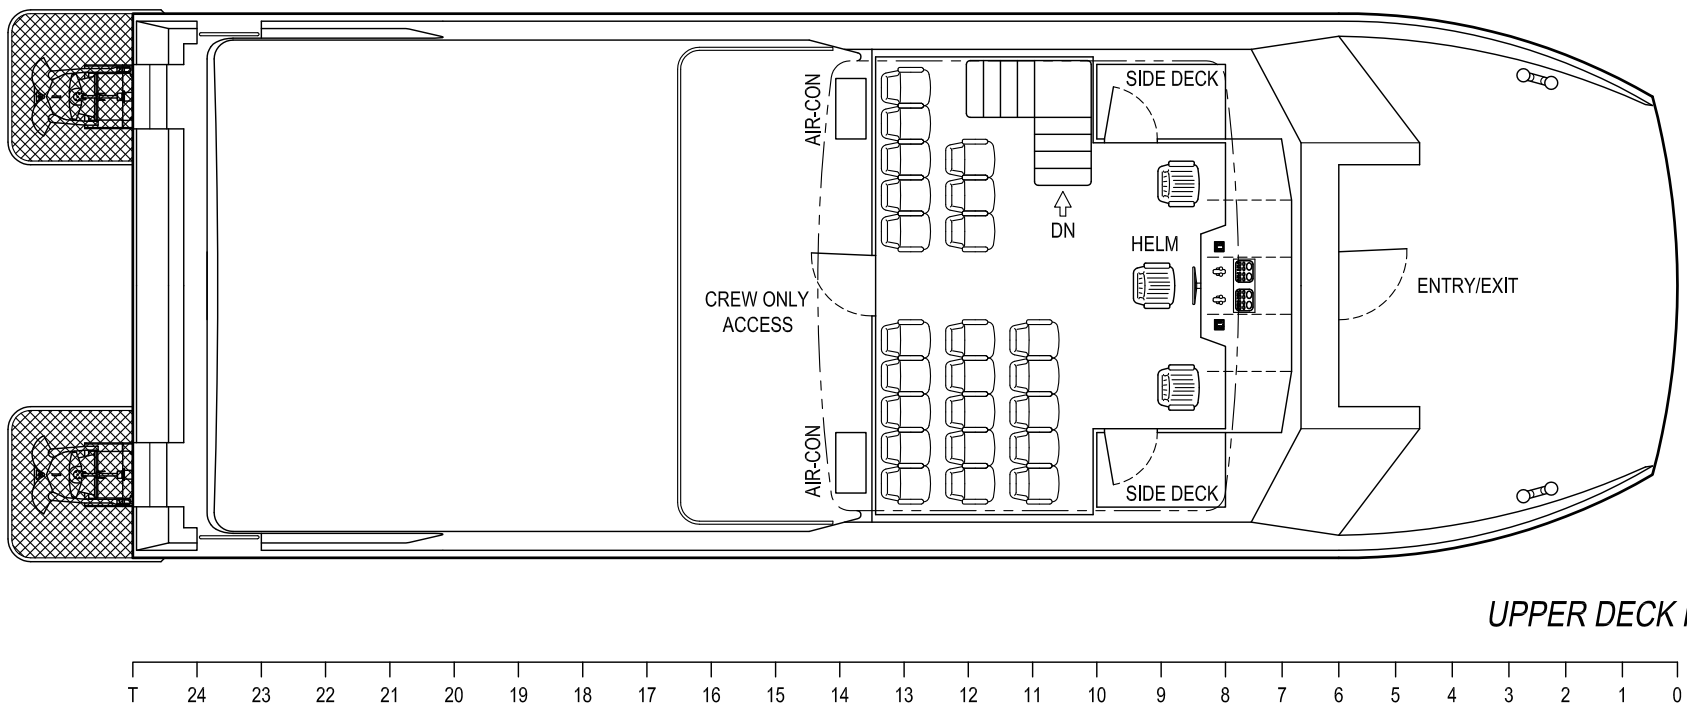

### VESSEL PARTICULARS

|                         |          |                           |                                  |
|-------------------------|----------|---------------------------|----------------------------------|
| LIGHTSHIP DISPLACEMENT: | 28 tonne | MAIN ENGINES:             | 2x Cummins QSK19-M               |
| MAXIMUM DISPLACEMENT:   | 44 tonne | PROPULSION:               | 2x Waterjets                     |
| LOA:                    | 22.0 m   | TOP SPEED:                | 23-26 knots                      |
| LWL:                    | 19.8 m   | GENSET:                   | 18 kVA                           |
| BEAM:                   | 7.20 m   | RANGE (with 10% reserve): | 420n.m.                          |
| DRAFT:                  | 0.80 m   | MAXIMUM PASSENGERS:       | 120                              |
| FUEL:                   | 7000 L   | CREW:                     | 3                                |
| FRESH WATER:            | 400 L    | SURVEY:                   | LLOYDS *100 A1 SSC, PAX, CAT, G3 |
| SULLAGE:                | 400 L    | SEAWORTHINESS:            | G3 (up to 150n.m. from refuge)   |

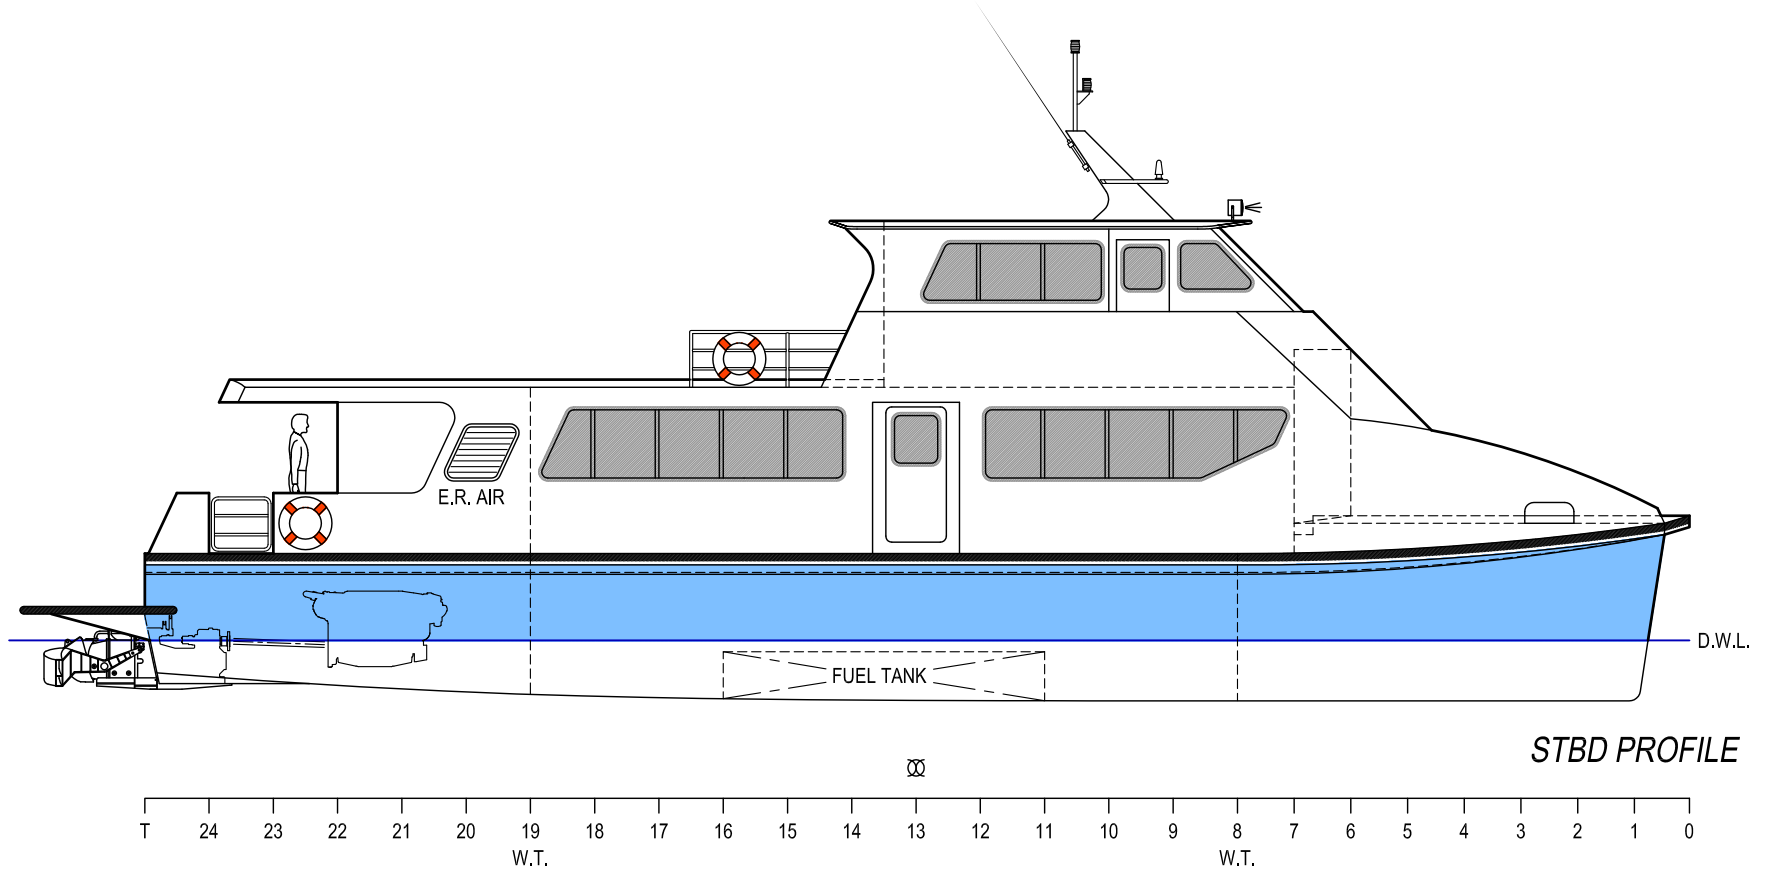

CONSULTING NAVAL ARCHITECTS

P: +618 9437 3096 E: andrew@abmarine.com.au